


ELIMINATOR




Insect-proof flow regulating micro-sprinkler for undertree irrigation

STRUCTURE AND FEATURES

- Prevents intrusion of all insects, including ants, snails, earwigs, spiders and Fuller's rose weevil
- Resistant to dust, sand, weeds and other external elements
- Flow-regulating for water saving and optimal efficiency
- Reliable, maintenance-free performance
- Wide range of flow rates and distribution patterns

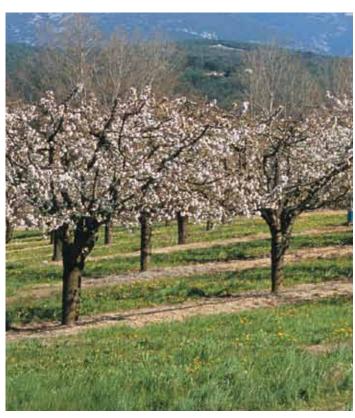

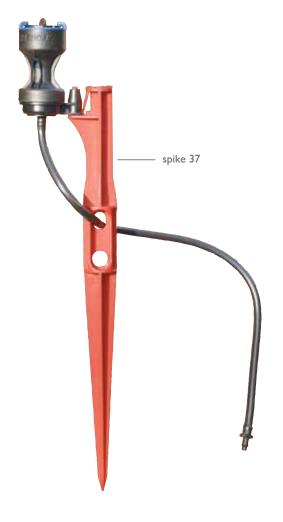



TECHNICAL DATA

• Recommended working pressure: 1.5-4.0 bar

• Flow rate: 20-95 I/h

• Diameter coverage: 4.0-7.0 m

• Two-stage wetted diameter control



Ist stage: with diameter limiter, for young trees



break off the diameter limiter, for mature trees



Special pop-up nozzle locks between irrigation cycles

PERFORMANCE TABLE

Regulator & nozzle bridge color	Flow rate (I/h)	Swivel color	Wetted diameter (m)
Purple	20	Black	4.0
Grey	28	Black	5.0
Brown	35	Black	5.5
Black	40	Black	5.5
Blue	47	Black	6.0
Green	55	Black	6.0
Orange	70	Black	7.0
Yellow	95	Black	7.0

Tested under laboratory conditions.

For 2 stages Eliminator:

- I st stage: wetted diameter is: 3-4m.
- 2nd stage: wetted diameter is according to the table.

HOUSINGS 4/7 barb — quick thread female — 3/8" BSP thread

